

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

1/20

FIG. 1

		Nd [wt%]	Pr [wt%]	Dy [wt%]	Co [wt%]	Cu [wt%]	Al [wt%]	B [wt%]	M(Zr,Ti) [wt%]	O ₂ [ppm]	N ₂ [ppm]	Fe	THICKNESS OF ALLOYS
EXAMPLE 1	LOW R ALLOY	23.6	6.0	0.3	—	0.05	0.23	1.1	0~0.22(Zr)	—	—	bal.	250~340 μm
	HIGH R ALLOY	40.6	—	—	5.0	0.05	0.23	—	—	—	—	bal.	530 μm
	COMPOSITION OF SINTERED BODY	25.0	5.3	0.3	0.5	0.05	0.23	1.0	0~0.20(Zr)	670	300	bal.	—
COMPARATIVE EXAMPLE 1	LOW R ALLOY	23.6	6.0	0.3	—	0.05	0.23	1.1	0~0.22(Ti)	—	—	bal.	250~340 μm
	HIGH R ALLOY	40.6	—	—	5.0	0.05	0.23	—	—	—	—	bal.	530 μm
	COMPOSITION OF SINTERED BODY	25.0	5.3	0.3	0.5	0.05	0.23	1.0	0~0.20(Ti)	780	320	bal.	—
COMPARATIVE EXAMPLE 2	LOW R ALLOY	23.6	6.0	0.3	—	0.05	0.23	1.1	—	—	—	bal.	310 μm
	HIGH R ALLOY	40.6	—	—	5.0	0.05	0.23	0.5	0~2.0(Zr)	—	—	bal.	470~550 μm
	COMPOSITION OF SINTERED BODY	25.0	5.3	0.3	0.5	0.05	0.23	1.0	0~0.20(Zr)	920	350	bal.	—
COMPARATIVE EXAMPLE 3	LOW R ALLOY	23.6	6.0	0.3	—	0.05	0.23	1.1	0~0.22(Zr)	—	—	bal.	470~550 μm
	HIGH R ALLOY	40.6	—	—	5.0	0.05	0.23	—	—	—	—	bal.	530 μm
	COMPOSITION OF SINTERED BODY	25.0	5.3	0.3	0.5	0.05	0.23	1.0	0~0.20(Zr)	630	290	bal.	—

2/20

FIG. 2

	ADDITIVE ELEMENT M	ADDITIVE AMOUNT OF M [wt%]	PRESENCE OR ABSENCE OF INTRAPHASE PRODUCT	Br [kG]	HcJ [kOe]	Hk/HcJ [%]
REFERENCE EXAMPLE	—	0	×	14.03	12.92	51.7
EXAMPLE 1	Zr	0.02	○	13.94	13.29	81.8
		0.03		13.97	13.39	96.5
		0.05		13.96	13.56	97.5
		0.10		13.95	13.62	96.3
		0.20		13.86	13.75	96.3
COMPARATIVE EXAMPLE 1	Ti	0.03	○	13.95	13.00	85.0
		0.05		13.90	12.85	98.2
		0.10		13.81	12.85	98.2
		0.15		13.75	13.08	97.9
		0.20		13.67	13.31	97.6
COMPARATIVE EXAMPLE 2	Zr	0.05	×	13.99	13.56	63.0
		0.10		13.90	13.43	85.2
		0.20		13.73	13.36	96.6
COMPARATIVE EXAMPLE 3	Zr	0	×	14.05	12.34	53.5
		0.05		13.98	12.58	73.3
		0.10		13.92	12.64	88.3
		0.20		13.78	12.67	96.6

3/20



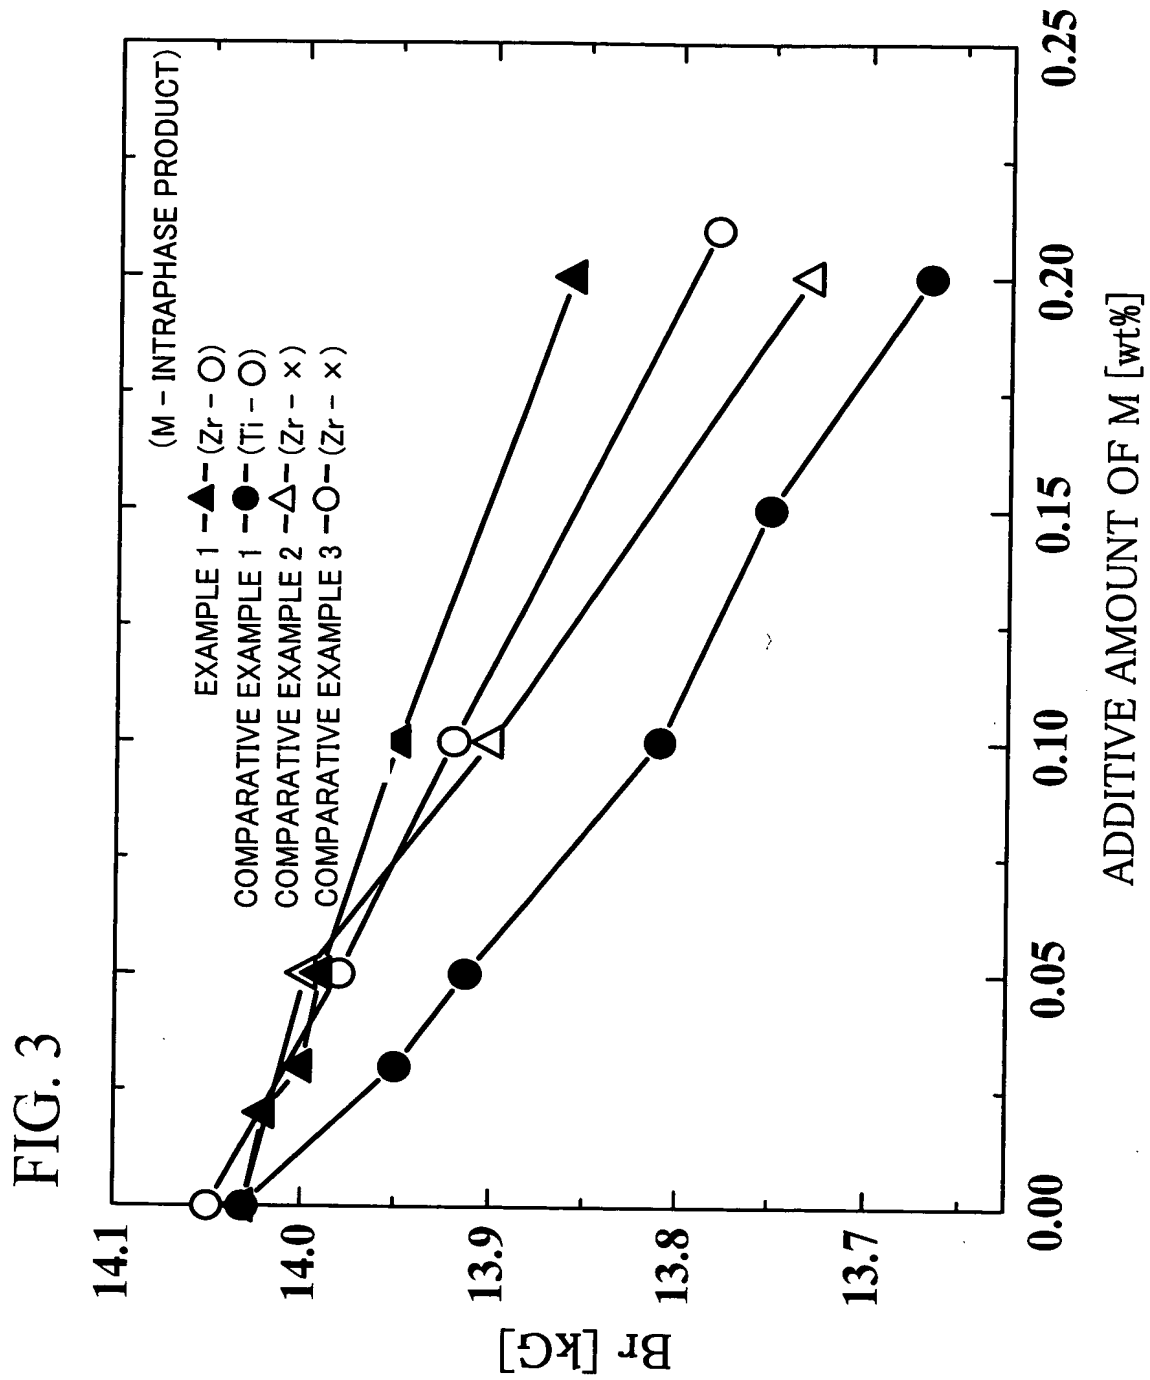


FIG. 4

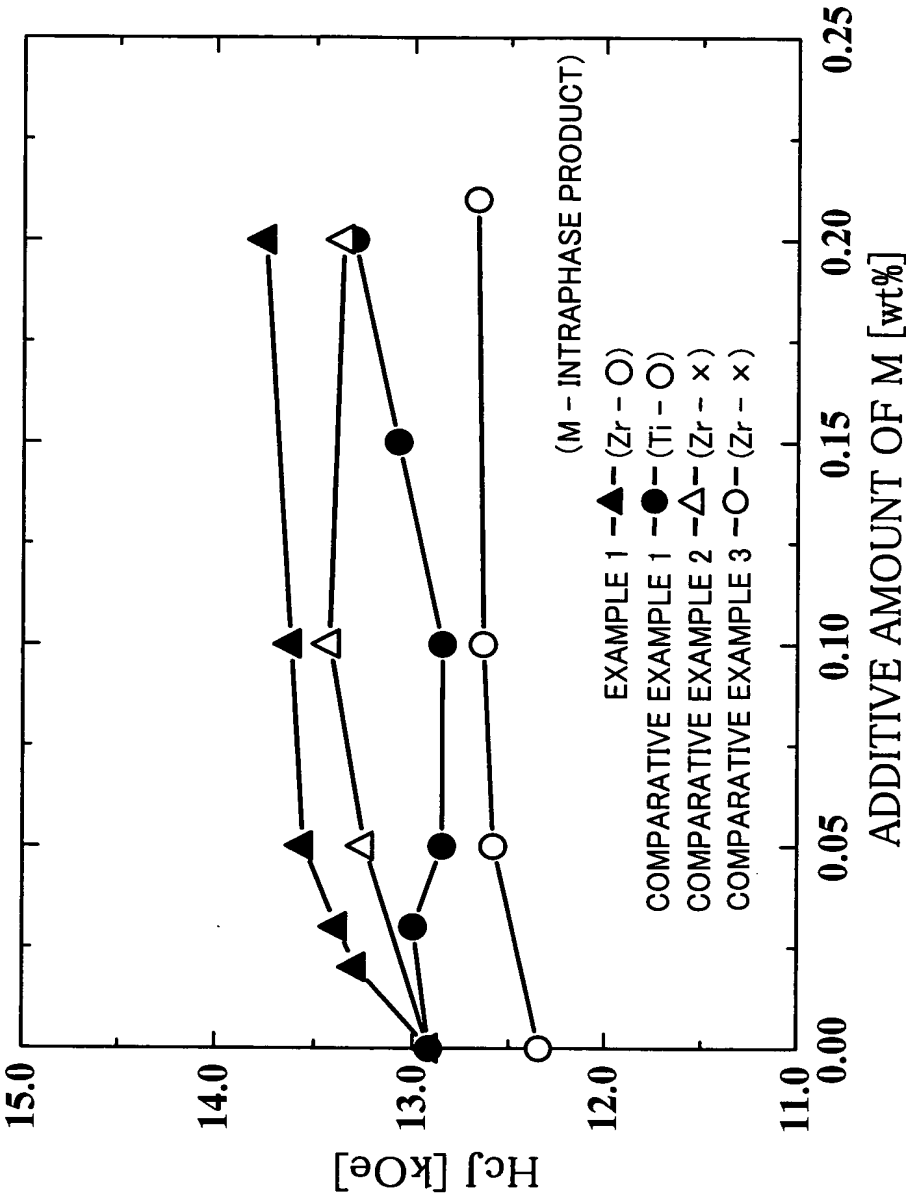

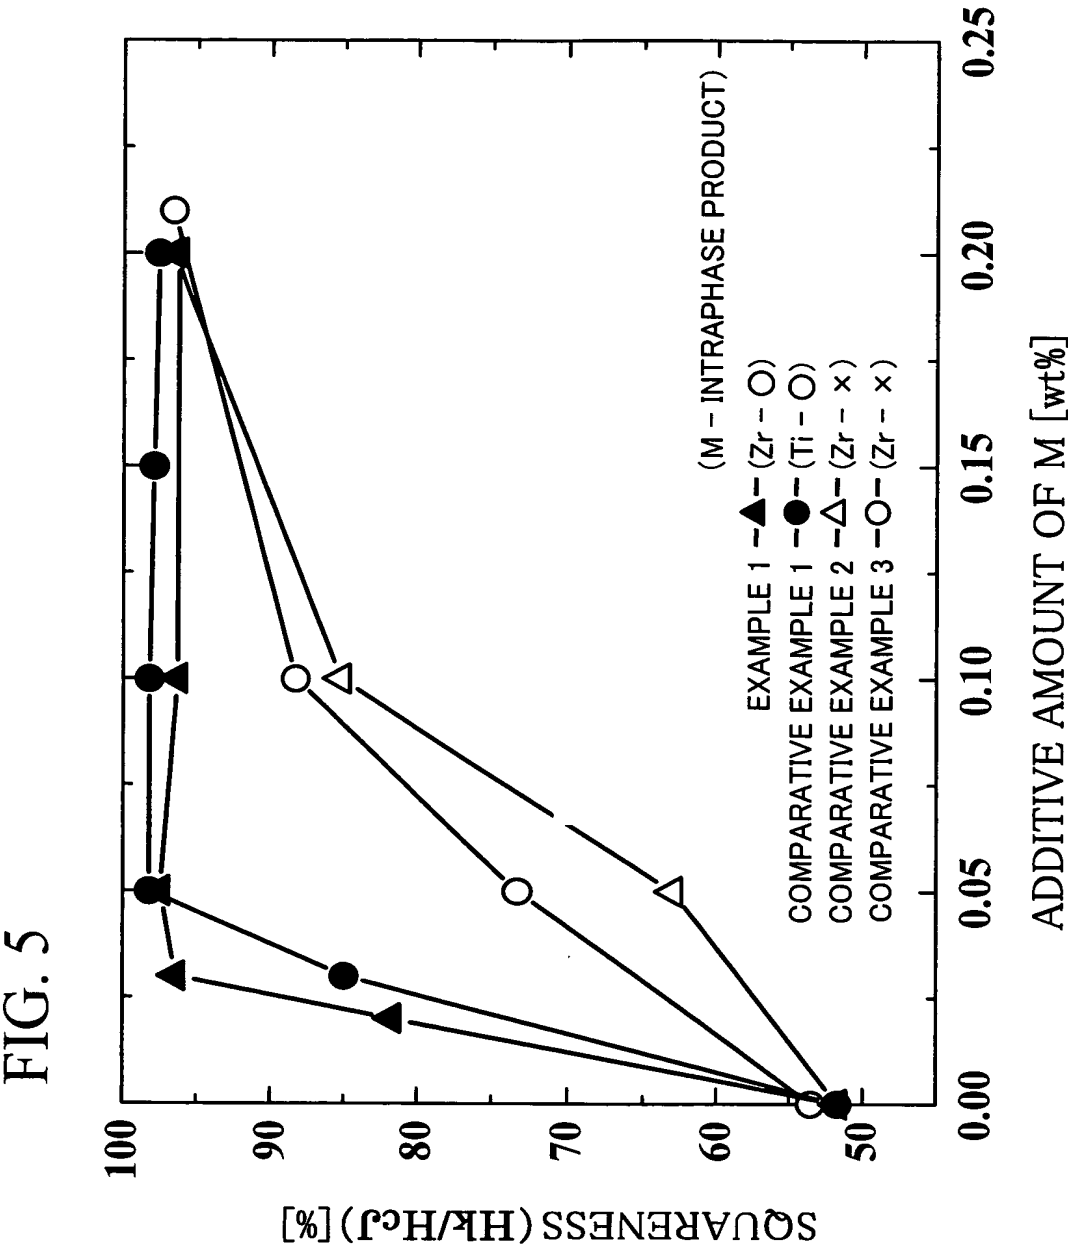

6/20

FIG. 6

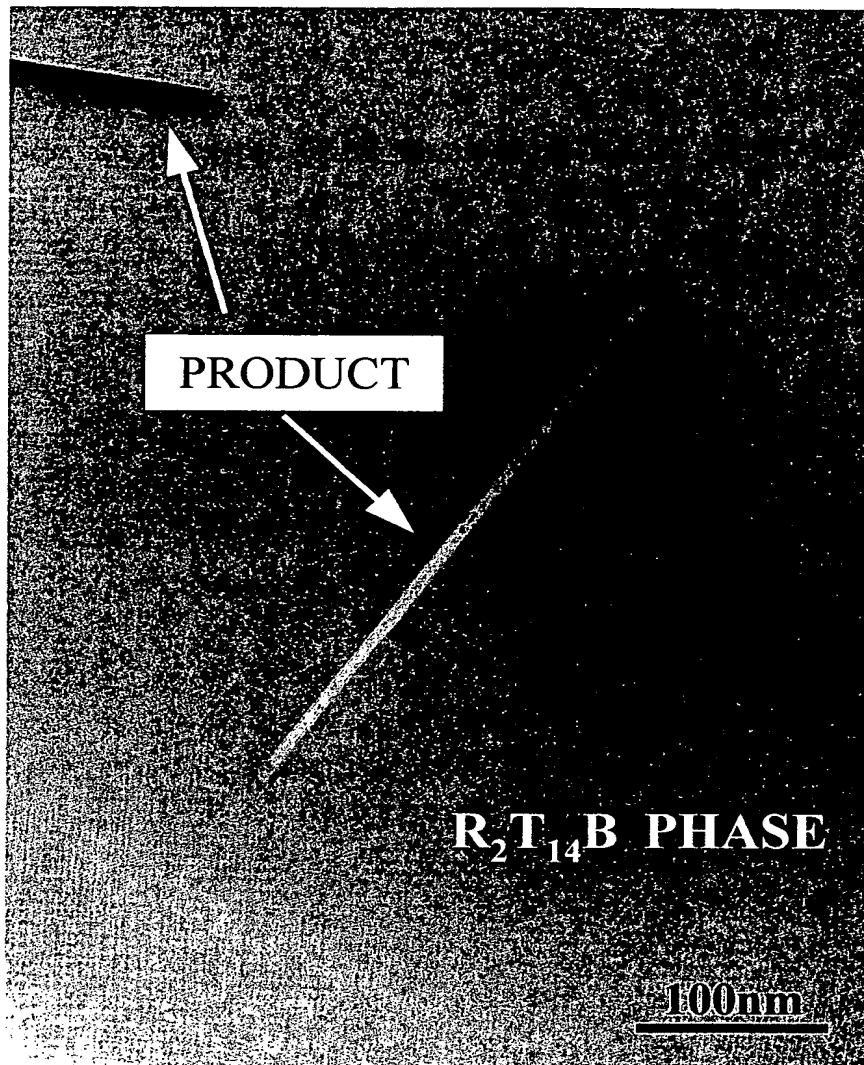


FIG. 7A



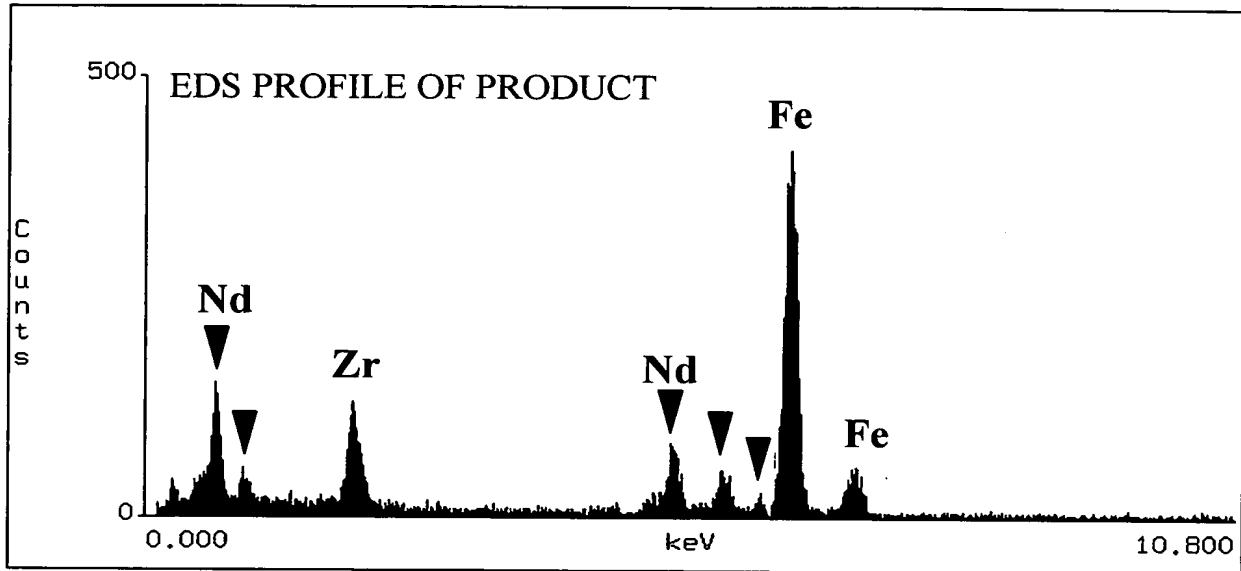


FIG. 7B

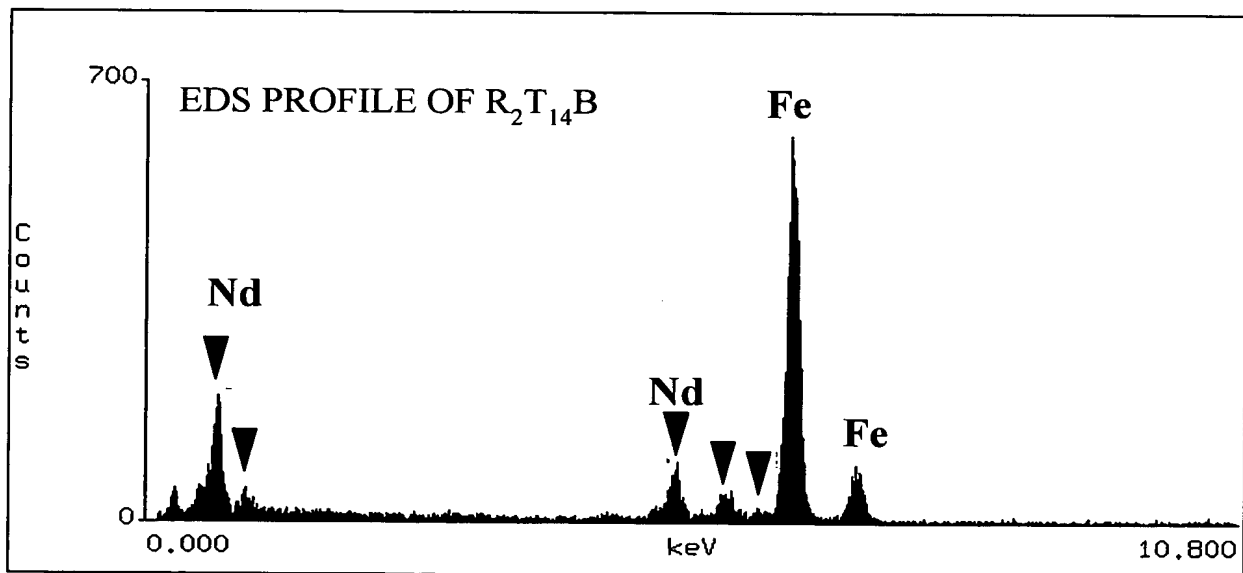


8/20

FIG. 8

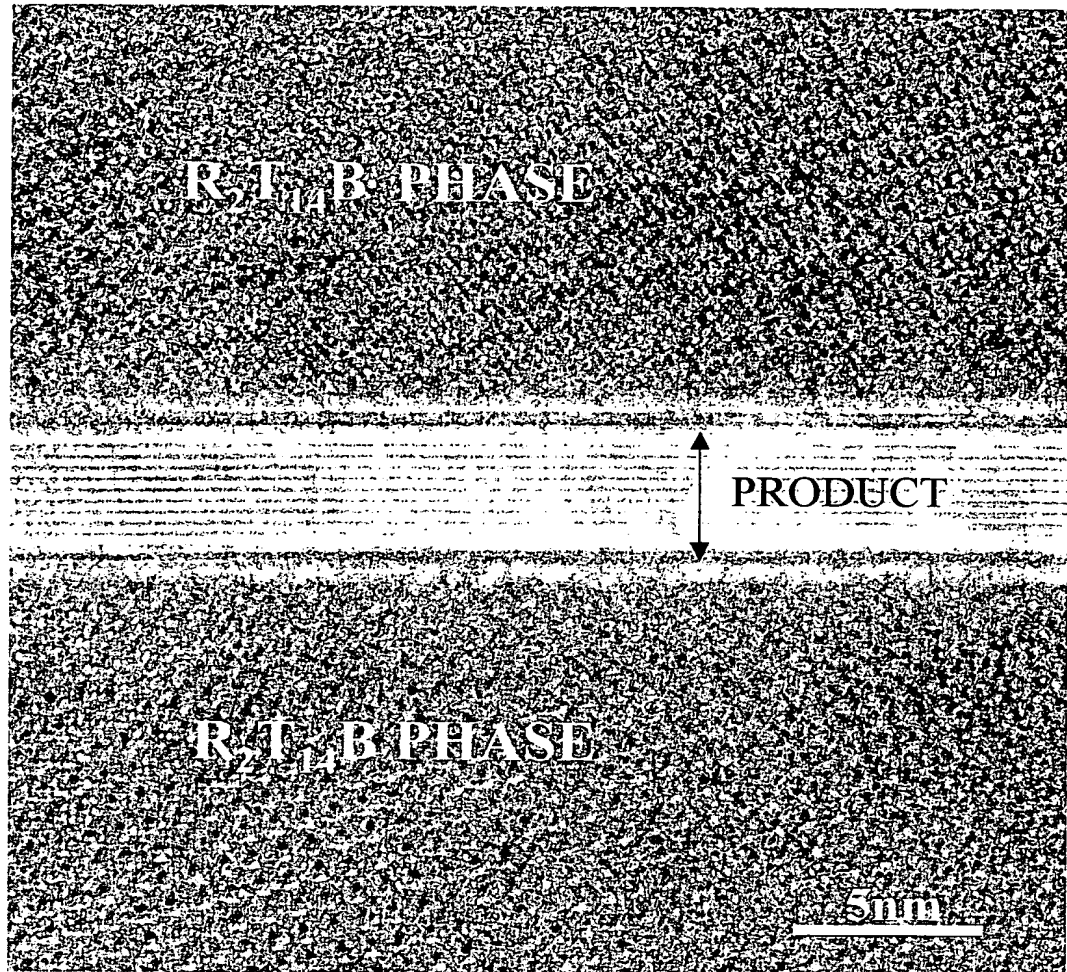


9/20

FIG. 9

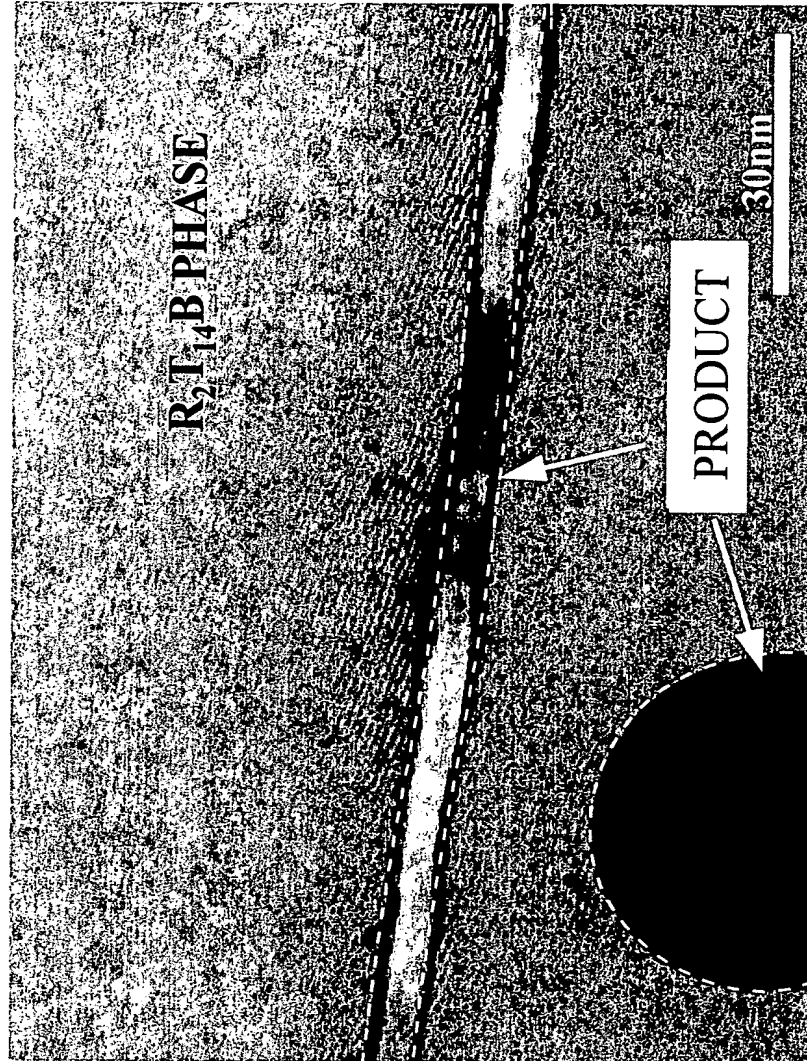

10/20

FIG. 10

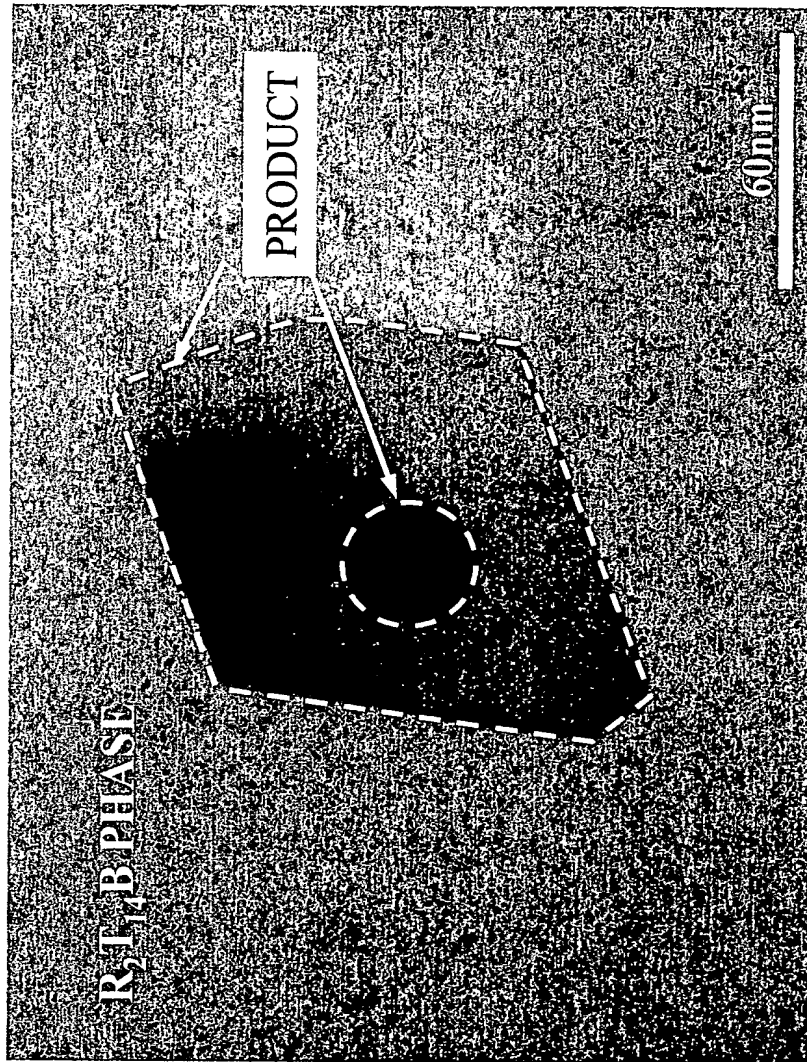

11/20

FIG. 11A


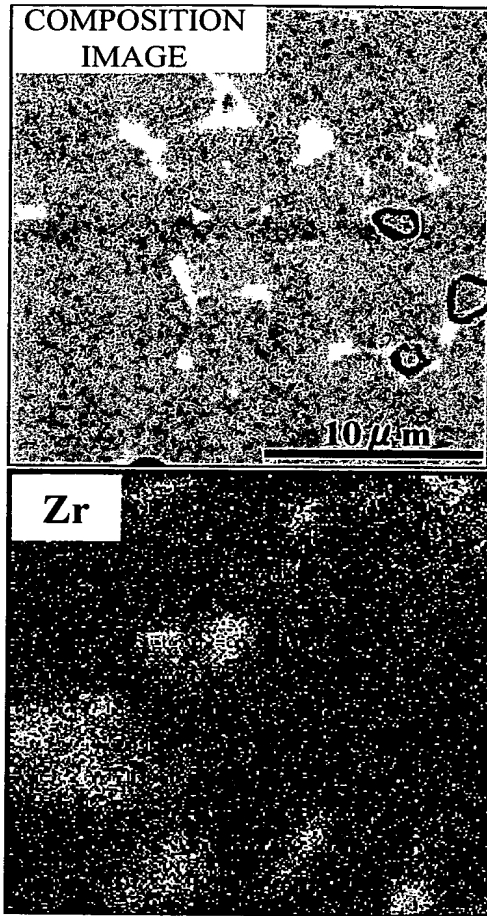


FIG. 11B

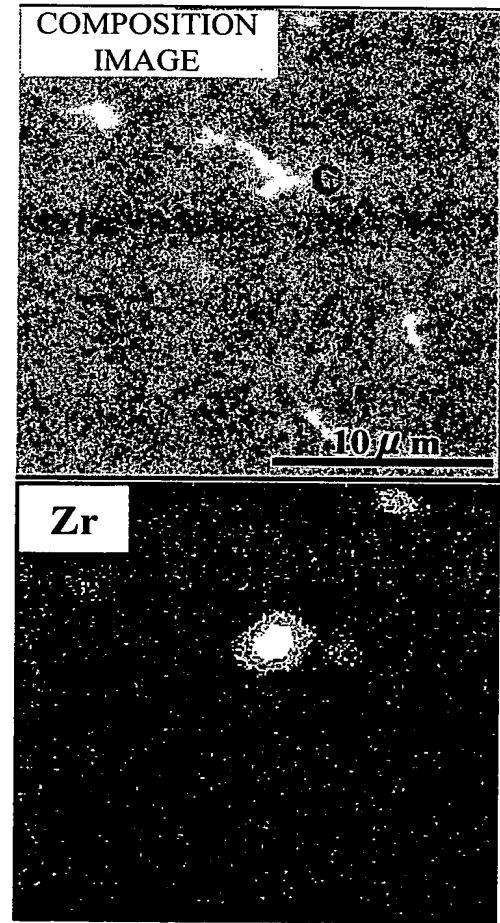


12/20


FIG. 12

	ADDITIVE ELEMENT M	ADDING METHOD OF M	ADDITIVE AMOUNT OF M [wt%]	PRESENCE OR ABSENCE OF INTRAPHASE PRODUCT	SINTERING TEMPERATURE [°C]	Br [kG]	HcJ [kOe]	Hk/HcJ [%]
REFERENCE EXAMPLE	—	—	0	x	1010 1030 1050 1070 1090	13.85 13.91 13.93 14.03 14.01	11.87 12.22 13.25 12.92 12.13	84.2 85.6 88.7 51.7 39.1
EXAMPLE 2	Zr	LOW R ALLOYS	0.1	O	1010 1030 1050 1070 1090	13.81 13.92 13.93 13.95 13.90	12.56 13.26 13.52 13.62 13.42	86.3 96.1 97.0 96.3 96.0
COMPARATIVE EXAMPLE 4	Ti	LOW R ALLOYS	0.1	O	1010 1030 1050 1070 1090	13.74 13.74 13.75 13.76 13.71	12.13 13.05 13.18 13.08 12.68	88.4 95.3 96.2 97.9 91.3
COMPARATIVE EXAMPLE 5	Zr	HIGH R ALLOYS	0.1	x	1010 1030 1050 1070 1090	13.84 13.85 13.87 13.90 13.75	12.24 12.34 13.20 13.18 12.56	86.3 88.7 91.5 90.1 75.3

13/20


FIG. 13

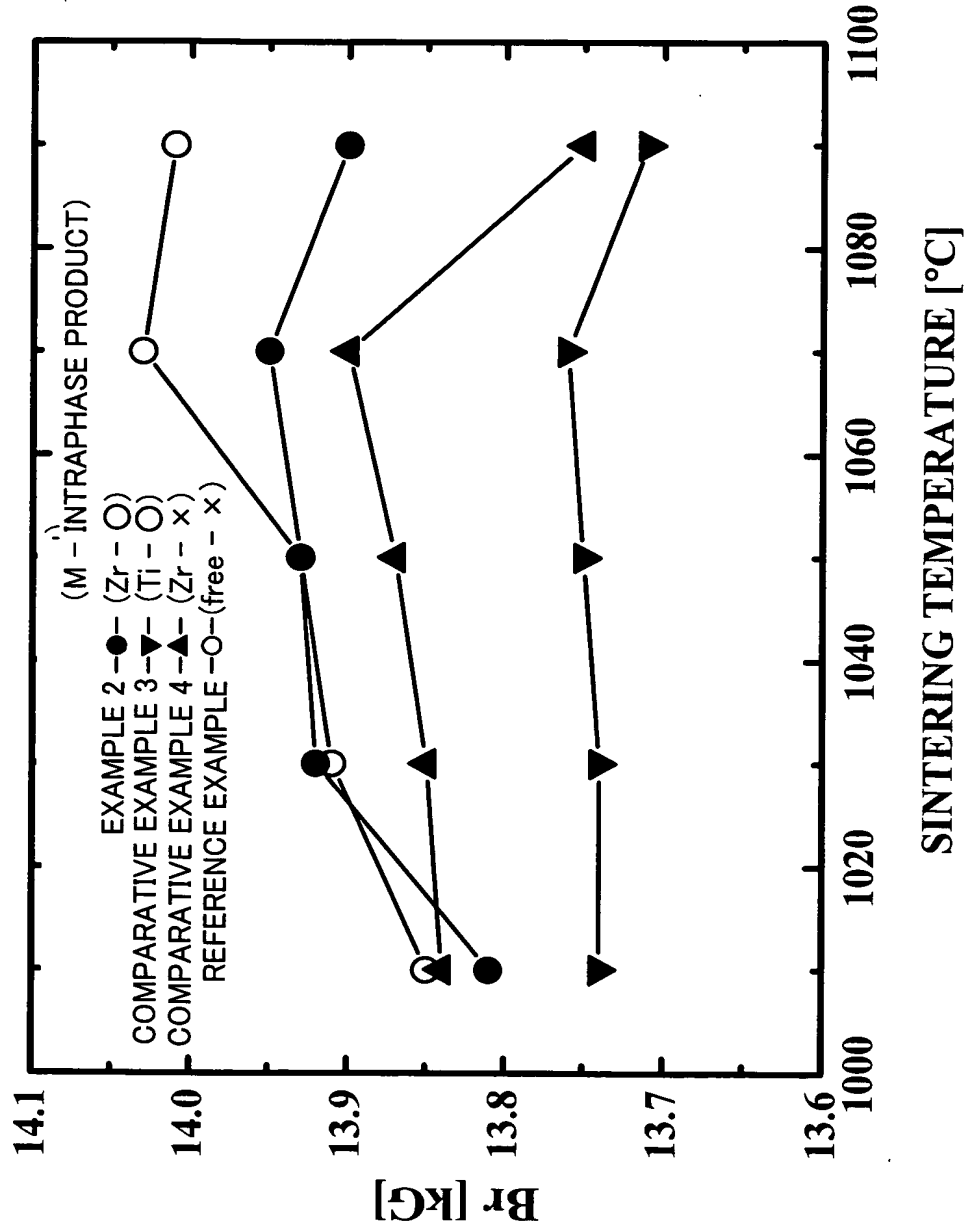

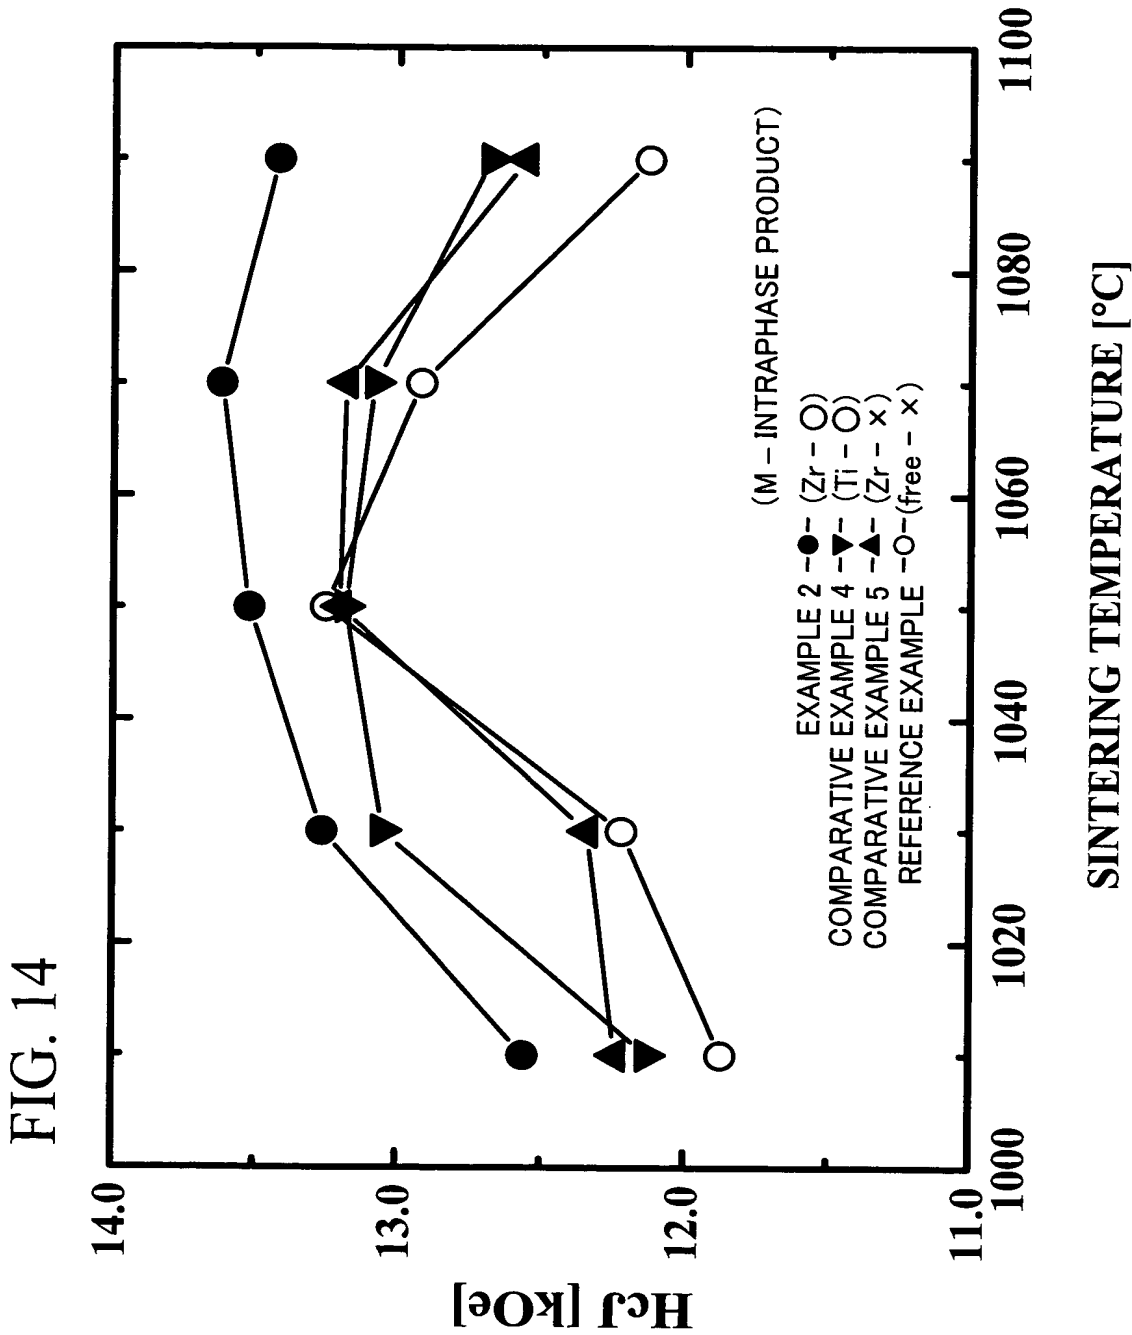


15/20

FIG. 15

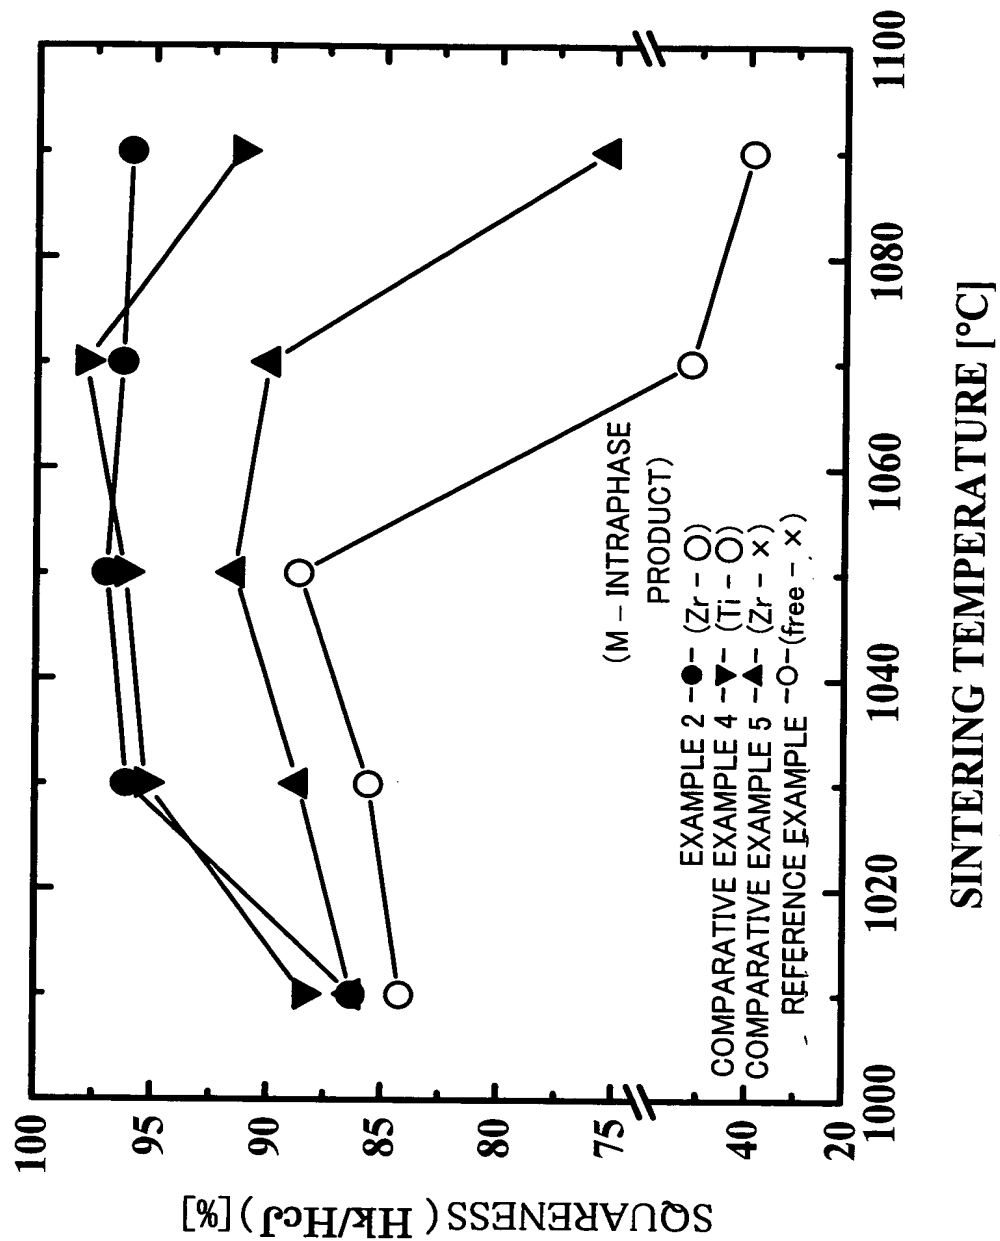

16/20

FIG. 16

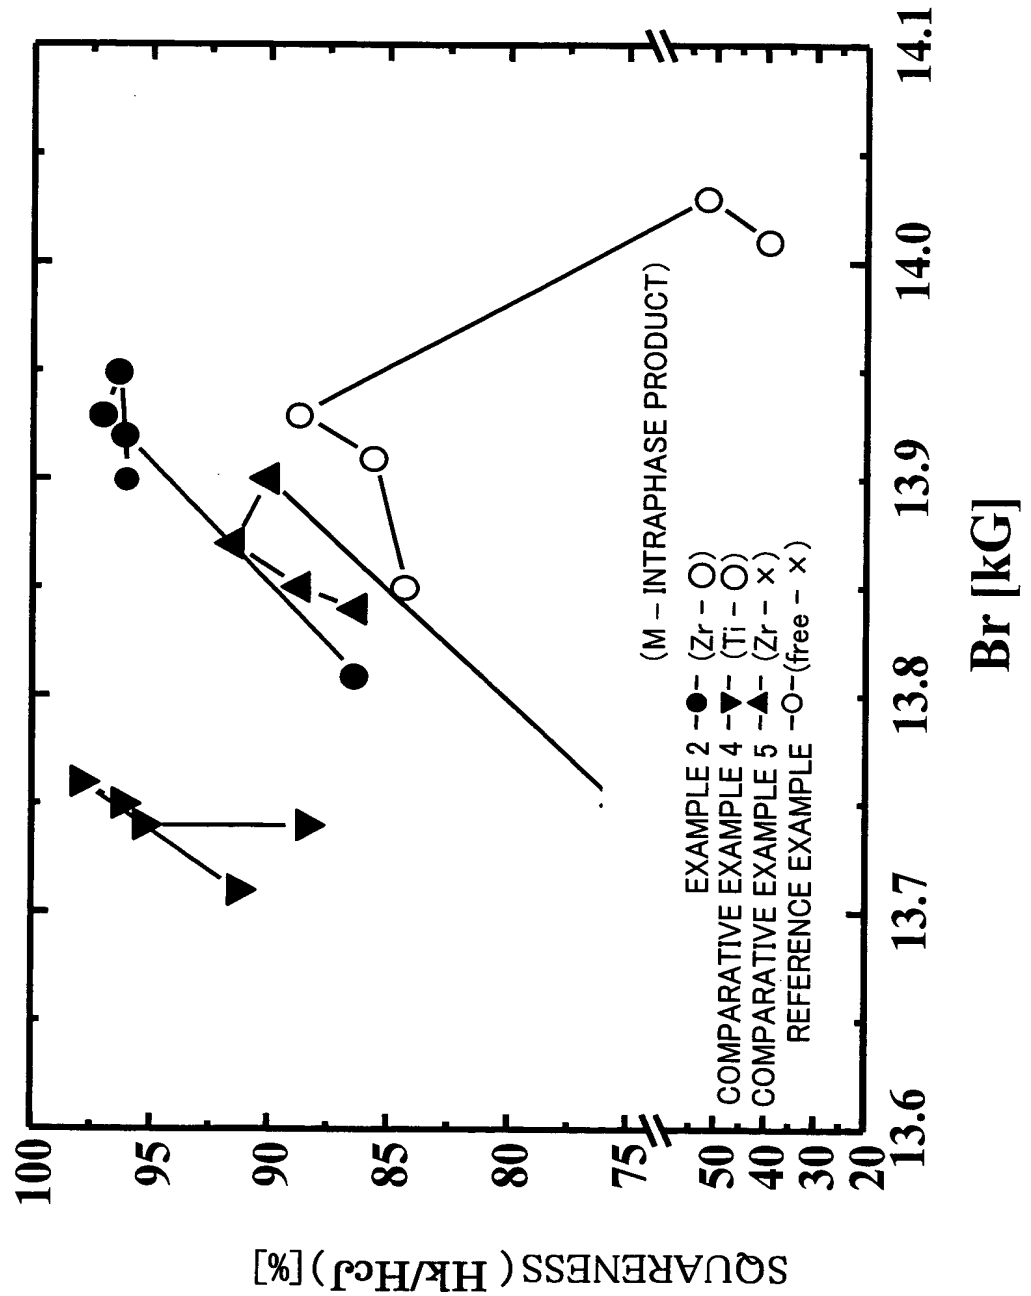

17/20

FIG. 17

		Nd [wt%]	Pr [wt%]	Dy [wt%]	Co [wt%]	Cu [wt%]	Al [wt%]	B [wt%]	Zr [wt%]	O ₂ [ppm]	N ₂ [ppm]	Fe [ppm]	ROLL PERIPHERAL VELOCITY [m/s]	THICKNESS OF ALLOYS [μm]
SAMPLE A	LOW R ALLOY	23.6	6.0	0.3	—	0.05	0.23	1.1	0.09	—	—	bal.	1.0	370
	HIGH R ALLOY	40.6	—	—	5.0	0.05	0.23	—	—	—	—	bal.	0.6	520
	COMPOSITION OF SINTERED BODY	25.0	5.3	0.3	0.5	0.05	0.23	1.0	0.08	980	380	bal.	—	—
SAMPLE B	LOW R ALLOY	23.0	5.7	0.4	—	0.05	0.18	1.1	0.12	—	—	bal.	1.8	240
	HIGH R ALLOY	40.6	—	—	5.0	0.05	0.23	—	—	—	—	bal.	0.6	520
	COMPOSITION OF SINTERED BODY	24.8	5.1	0.4	0.5	0.05	0.19	1.0	0.11	720	440	bal.	—	—
SAMPLE C	LOW R ALLOY	22.5	6.2	0.4	—	0.05	0.23	1.1	0.20	—	—	bal.	1.6	270
	HIGH R ALLOY	40.6	—	—	5.0	0.05	0.23	—	—	—	—	bal.	0.6	520
	COMPOSITION OF SINTERED BODY	24.3	5.6	0.4	0.5	0.05	0.23	1.0	0.18	870	420	bal.	—	—
SAMPLE D	LOW R ALLOY	22.7	5.9	1.3	—	0.05	0.23	1.1	0.20	—	—	bal.	1.5	320
	HIGH R ALLOY	30.3	—	10.0	5.0	0.05	0.15	—	—	—	—	bal.	0.6	550
	COMPOSITION OF SINTERED BODY	23.5	5.3	2.2	0.5	0.05	0.22	1.0	0.18	680	390	bal.	—	—

18/20

FIG. 18

	SINTERING TEMPERATURE [°C]	Br [kG]	HcJ [kOe]	Hk/HcJ [%]
SAMPLE A	1010	14.05	11.13	88.6
	1030	14.06	14.61	95.0
	1050	14.14	14.61	97.0
	1070	14.14	13.45	95.2
	1090	14.22	4.26	44.0
SAMPLE B	1010	14.03	11.85	88.0
	1030	14.10	14.67	95.6
	1050	14.13	14.71	96.4
	1070	14.15	14.35	97.5
	1090	14.08	13.52	96.0
SAMPLE C	1010	13.98	12.81	87.3
	1030	14.07	14.67	95.3
	1050	14.08	14.72	96.1
	1070	14.08	14.70	98.2
	1090	14.08	14.61	97.9
SAMPLE D	1010	13.90	14.31	95.6
	1030	13.90	16.07	97.8
	1050	13.90	16.18	97.9
	1070	13.91	16.22	97.8
	1090	13.92	15.83	72.1

19/20

FIG. 19

		Nd [wt%]	Pr [wt%]	Dy [wt%]	Co [wt%]	Cu [wt%]	Al [wt%]	B [wt%]	Zr [wt%]	O ₂ [ppm]	N ₂ [ppm]	Fe
SAMPLE E	LOW R ALLOY	27.9	—	0.1	—	0.03	0.05	1.1	0.08	—	—	bal.
	HIGH R ALLOY	35.1	—	—	2.0	0.03	0.05	—	—	—	—	bal.
	COMPOSITION OF SINTERED BODY	28.3	—	0.1	0.2	0.03	0.05	1.0	0.07	720	360	bal.
SAMPLE F	LOW R ALLOY	23.7	6.0	0.2	—	0.30	0.25	1.6	0.30	—	—	bal.
	HIGH R ALLOY	40.6	—	—	20.0	0.30	0.25	—	—	—	—	bal.
	COMPOSITION OF SINTERED BODY	26.9	4.8	0.2	4.0	0.30	0.25	1.3	0.24	980	450	bal.

20/20

FIG. 20

	Br [kG]	HcJ [kOe]	Hk/HcJ [%]
SAMPLE E	14.62	13.10	98.0
SAMPLE F	13.88	15.30	96.0
SAMPLE A	14.14	13.45	95.2
SAMPLE B	14.15	14.35	97.5
SAMPLE C	14.08	14.70	98.2
SAMPLE D	13.91	16.22	97.8